



JACKET FEATURES

- » Front zipper
- » Standing collar with push buttons
- » Raglan arm shape
- » Conductive knitted cuffs at arms
- » ESD symbol on chest

OPTIONAL

- » CHEST, HIP OR BOTTOM POCKETS
- » PEN, IDENTITY CARD LOOPS
- » COMPANY LOGOS

TROUSERS FEATURES

- » Adjustable waistband
- » Conductive knitted cuffs at the legs
- » With ESD symbol

OPTIONAL

- » POCKETS
- » COMPANY LOGOS

FABRIC PROPERTIES

- » Static dissipative woven fabric (carbon loaded yarns in 5 mm grid)
- » For Clean Room class 10000, ISO 7
- » **Composition:** 98% Polyester 2% Conductive fiber
- » **Fabric Weight:** 115 g/m²
- » **Finish:** Crease resists, workwear
- » **Resistance from point to point (Rp):** 10⁶ - 10⁷ Ohm
- » **Charging time:** < 2 seconds
- » Complies with IEC/TS 61340-4-9:2016 and ANSI/ESD STM2.1:2018, and keeps this compliance after more than 50 industrial washings
- » Developed for industrial washing

CR10 FABRIC

LB W



Individual custom made ESD Clothing also available!



JACKET ORDERING CODE

JAC - **CR10** - **W** **L**
 style fabric colour size

TROUSERS ORDERING CODE


TRU - **CR10** - **W** **L**
 style fabric colour size

Certified clothing according to the 2018 ESD standard. It's proved with the following tag.



JAC CLEANROOM JACKET	3XS	XXS	XS	S	M	L	XL	XXL	3XL	4XL
Chest/bust measurement	106,0	109,0	112,0	116,0	124,0	131,0	136,0	141,0	146,0	154,0
Waist measurement	99,0	102,0	105,0	109,0	117,0	124,0	129,0	134,0	139,0	147,0
Perim. of lower border	115,0	118,0	121,0	125,0	133,0	140,0	145,0	150,0	155,0	163,0
Length of back part	73,5	75,5	78,5	81,5	85,5	88,0	90,0	92,5	94,0	94,0
Lower length of arm	52,0	53,0	54,0	55,5	58,5	58,5	59,5	60,0	60,0	61,0
Perimeter of neck	45,0	46,5	47,5	48,0	50,0	55,0	57,0	59,0	59,0	59,0
TRU CLEANROOM TROUSERS	3XS	XXS	XS	S	M	L	XL	XXL	3XL	4XL
Waist perimeter gathered	75,0	78,0	80,0	83,0	87,0	90,0	99,0	103,0	107,0	114,0
Waist perimeter stretched	98,0	102,0	104,0	108,0	113,0	116,0	128,0	133,0	138,0	146,0
Bottom perimeter	108,0	111,0	114,0	118,0	120,0	123,0	133,0	138,0	143,0	149,0
Length at the side	103,0	105,0	107,0	110,5	113,0	116,0	121,0	125,0	127,0	131,0
Length of stride	74,0	75,5	78,0	80,0	82,0	84,5	88,0	90,0	92,0	94,0
Thigh width	58,0	59,0	61,0	62,0	63,0	66,0	71,0	74,0	78,0	82,0

Size tolerance (Before washing): 2%

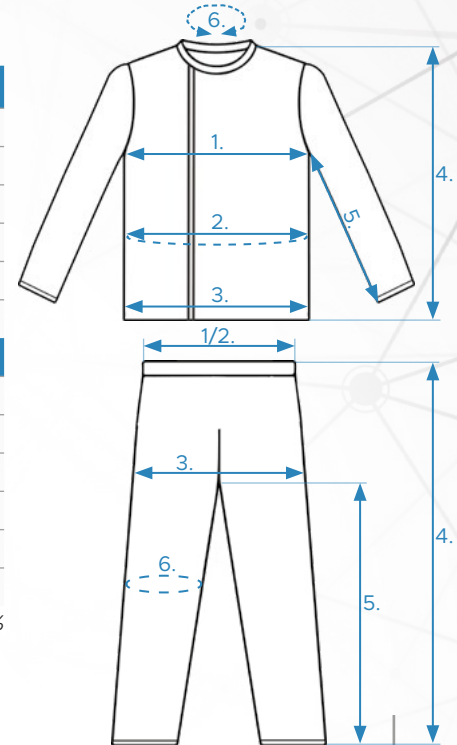

WASHING INSTRUCTIONS

Conductive carbon fibres used in ESD fabrics are very sensitive to high temperatures, alkalis, acids, rinses (softeners) and bleaches. Inadequate use may cause damage to carbon fibres and ESD clothing may lose or significantly deteriorate ESD parameters. Therefore, wash ESD clothing very carefully, in each case please follow the instructions:

- i** In order to preserve the long life of ESD clothings, please use industrial laundries who can provide controlled, documented washing procedures and environment
- i** Wash in cold or not warmer than 40 °C (104 °F) lukewarm water with neutral liquid detergent
- i** Do not use detergents and / or rinse aids that contain bleach and / or chlorine
- i** Bleachers are forbidden
- i** Do not use rinse aids or detergents with a high alkali or high acid content
- i** Do not dry clean
- i** Tumble drying is prohibited
- i** Does not require ironing, but if absolutely necessary, iron at a maximum temperature of 110 °C (230 °F) without steaming
- i** Wash all items inside out
- i** Using deodorant can damage the color of the product
- i** When drying clothes outdoors, do not expose them to direct sunlight
- i** Tighten the zippers before each wash



WARRANTY

- !** The warranty is strictly valid under controlled and documented industrial laundry conditions, concern the fabric washing cycle as specified in the technical data's.
- !** The warranty is NOT valid if the washing process is made in home environment!
- !** The warranty covers ESD parameters and possible sewing errors according to IEC 61340-4-9:2016 and ANSI/ESD STM2.1:2018 standard issued only!
- !** The warranty does not cover the size and shrinkage differences within the tolerances given at the size charts!
- !** Our clothing products are provided with the „Operating instructions with symbols” according to the MSZ EN ISO 3758:2012 standard.
- !** Thread extension or tearing should not be the basis for a complaint.
- !** If the product shows improper tampering, the complaint will be rejected.